


# 4

## Folding arm drives



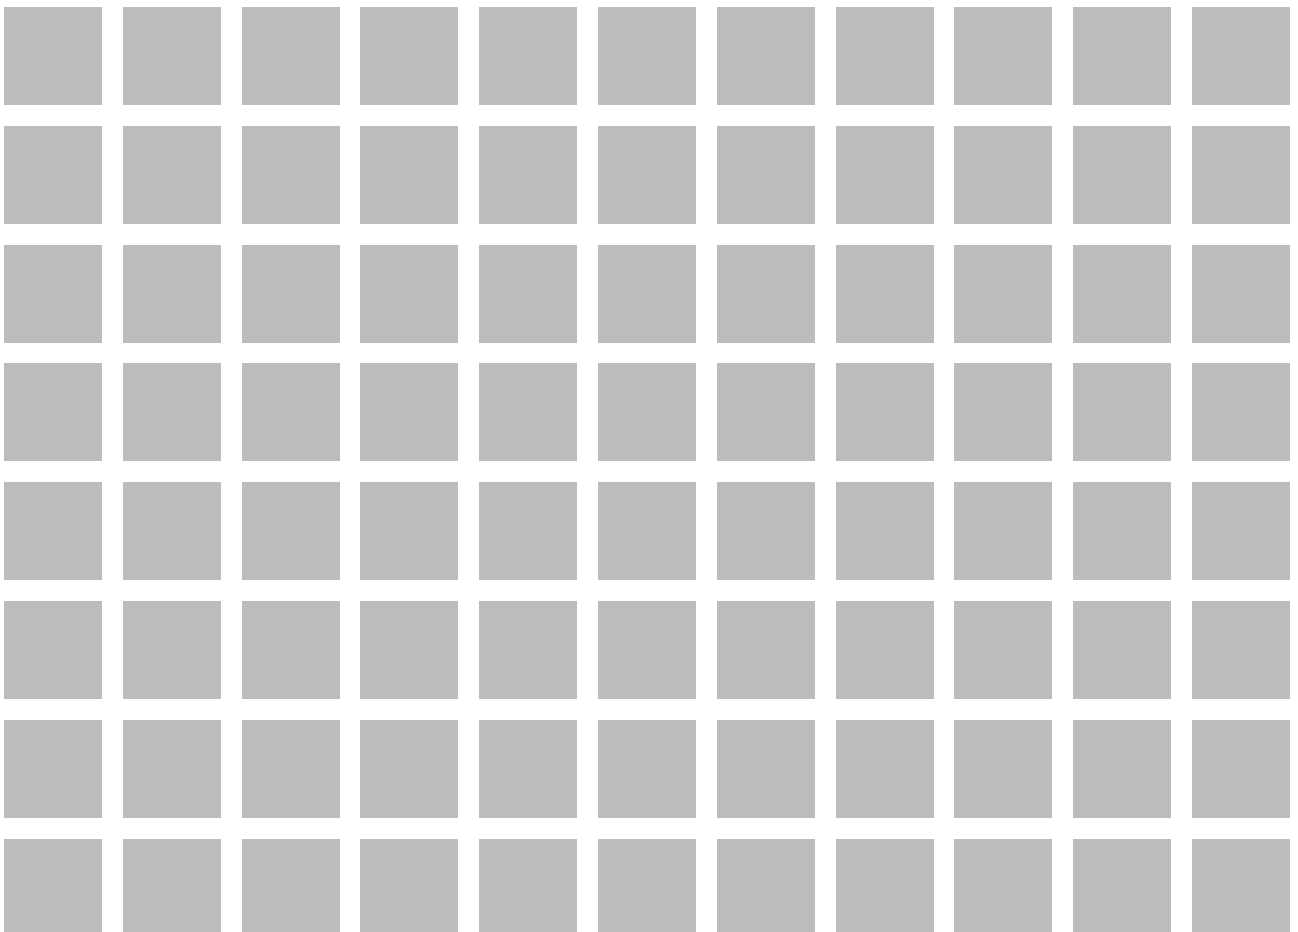

**FTA600 R**

### FTA600 R FOLDING ARM DRIVES

- Model 24V DC, S12
- Pulling/Pushing force 215 Nm / 215 Nm
- Stroke length (lever) 0 – 93 Degree
- Speed 2,0 Degree/s (45 s für 90°)
- Housing (WxH) 40 x 56 x 421 mm, aluminum
- Opening mechanism Lever arm 20 x 30 x 405 mm, aluminum
- Version Solo with roller for air inlets
- Protection rating IP32



**FTA600 DF**

### FTA600 DF FOLDING ARM DRIVES

- Model 24V DC, S12
- Pulling/Pushing force 215 Nm / 215 Nm
- Stroke length (lever) 0 – 93 Degree
- Speed 2,0 Degree/s (45 s for 90°)
- Housing (WxH) 40 x 56 x 421 mm, aluminum
- Opening mechanism Lever arm 20 x 30 x 381 mm, aluminum
- Version Solo with knuckle joint for side-hung inward opening windows
- Protection rating IP32



**FTA600 GF**

### FTA600 GF FOLDING ARM DRIVES

- Model 24V DC, S12
- Pulling/Pushing force 215 Nm / 215 Nm
- Stroke length (lever) 0 – 93 Degree
- Speed 2,0 Degree/s (45 s for 90°)
- Housing (WxH) 40 x 56 x 421 mm, aluminum
- Opening mechanism Lever arm 20 x 30 x 444 mm, aluminum
- Version Solo with slide rail for side hung outward opening windows
- Protection rating IP32

FOLDING ARM DRIVES																
Type	Form	Model		Opening angle (Factory setting)	Torque		Running time (Factory setting)		Cut-off current	Use			Location	Functions		
		Type of cut-off	Rated voltage	Range	Opening torque	Closing torque	OPEN	CLOSE		Max.	Natural ventilation	RWA		NRWG	Facade	Run monitoring
			[VDC]	[mm]	[Nm]	[Nm]	[mm/s]	[mm/s]	[A]							
FTA	FTA R	S12	24	0 – 93	215	215	45,0	45,0	1,4	●	●	●	●	●	●	●
	FTA DF					215				●	●	●	●	●	●	
	FTA GF					215				●	●	●	●	●	●	

**LEGEND**

● suitable    ■ not recommended

S12 internal intelligent cut-off switch for synchronised run and programmable functions