



- Application: Natural ventilation as single-drive
- Internal load dependent cut-off switch S2 in OPEN / CLOSE direction



TECHNICAL DATA

U_N	Rated voltage	24V DC (19 V ... 28 V)
I_N	Rated current	0,5 A
I_A	Cut-off current	0,7 A
P_N	Rated power	12 W
DC	Duty cycle	5 cycles (ED 30 % - ON: 3 min./OFF: 7 min.)
	Protection rating	IP 32
	Ambient temperature range	-5 °C ... +60 °C
F_Z	Pulling force max.	200 N
F_A	Pushing force max.	

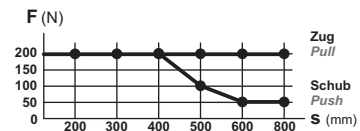

s > 600 mm only for pulling application

F_H	Pullout force	1.800 N (fastening depended)
	Chain	Stainless steel, without protruding rivet heads. Simple connection to casement brackets. Small bending radii allow maximum opening angles of small windows.
	Connecting cable	non-halogen, grey 5 x 0,5 mm ² , ~ 3 m
v	Speed	10,0 mm/s 10,0 mm/s
s	Stroke	50 – 800 mm
L	Length	see order data
	Sound pressure level	≤ 70 dB (A)

ORDER DATA							
s [mm]	L [mm]	Version	Finish	PU/pcs.	Part.-No.		
200	335	KS2 200 S2 24V R	E6/C-0	1	521120		
		KS2 200 S2 24V L	E6/C-0	1	521420		
300	380	KS2 300 S2 24V R	E6/C-0	1	521130		
		KS2 300 S2 24V L	E6/C-0	1	521430		
400	430	KS2 400 S2 24V R	E6/C-0	1	521140		
		KS2 400 S2 24V L	E6/C-0	1	521440		
500	545	KS2 500 S2 24V R	E6/C-0	1	521150		
		KS2 500 S2 24V L	E6/C-0	1	521450		
600	545	KS2 600 S2 24V R	E6/C-0	1	521160		
		KS2 600 S2 24V L	E6/C-0	1	521460		
800	625	KS2 800 S2 24V R	E6/C-0	1	521180		
		KS2 800 S2 24V L	E6/C-0	1	521480		

OPTIONS							
Special model		PU/pcs.	Part.-No.				
Drive housing painted/powder coated in other RAL colours							
Lump sum for coating				516030			
Specify at order stage:		1 – 20	516004				
		21 – 50	516004				
		51 – 100	516004				
		from 101	516004				
Extra length connecting cable:							
5 m – non-halogen, grey – 5 x 0,5 mm ²				501054			
10 m – non-halogen, grey – 5 x 0,5 mm ²				501056			