


- 应用: 自然通风, 排烟排热, ferralux®-NSHEV
 - S12内置智能关机模块
 - Z版本: 可编程开启和关闭位置的反馈 (最大24 V, 500 mA)
- 选项
- 特殊编程功能
 - 可使用M-COM模块自动同步多台开窗器的运行; 当开窗器与电锁连接时, 可使用该模块对其进行顺序控制(S3/S12 软件版本为 V2)

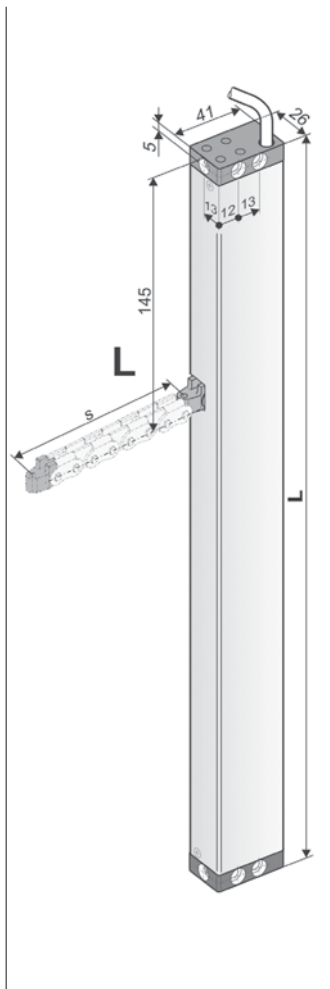

技术参数

U_N	额定电压	24V DC ($\pm 20\%$), max. 2 Vpp									
I_N	额定电流	0,7 A									
I_A	关机电流	1,0 A									
P_N	额定功率	17 W									
ED	运行间隔	30 %									
	防护等级	IP 32									
	环境温度	-5 °C ... +75 °C									
F_z	最大拉力	300 N									
F_A	推力	<p>$s > 600$ mm 仅适用于拉力</p>									
F_H	闭锁力	3.000 N (取决于安装)									
	链条材质	不锈钢 (1.4310)									
	连接电缆	无卤, 灰色 3 x 0,5 mm ² , ~3m Z版本: 5 x 0,5 mm ² , ~3m									
v	速度	<table border="0"> <tr> <td>$s < 400$</td> <td> 8,0 mm/S</td> <td> 8,0 mm/S</td> </tr> <tr> <td>$s 500 - 600$</td> <td> 12,0 mm/S</td> <td> 8,0 mm/S</td> </tr> <tr> <td>$s > 600$</td> <td> 13,5 mm/S</td> <td> 8,0 mm/S</td> </tr> </table>	$s < 400$	8,0 mm/S	8,0 mm/S	$s 500 - 600$	12,0 mm/S	8,0 mm/S	$s > 600$	13,5 mm/S	8,0 mm/S
$s < 400$	8,0 mm/S	8,0 mm/S									
$s 500 - 600$	12,0 mm/S	8,0 mm/S									
$s > 600$	13,5 mm/S	8,0 mm/S									
s	行程	200 - 800 mm ($\pm 5\%$)									
L	长度	取决于订货行程									

订货信息							
s [mm]	L [mm]	型号	表面处理	每单元/件数	订购号	LZ	PG
200	335	KS2 200 S12 24V L	E6/C-0	1	521720	●	
			RAL 9016	1	1001521720	●	
		KS2 200 S12 24V L Z	E6/C-0	1	521723	●	
			RAL 9016	1	1001521723	●	
300	380	KS2 300 S12 24V L	E6/C-0	1	521730	●	
			RAL 9016	1	1001521730	●	
		KS2 300 S12 24V L Z	E6/C-0	1	521733	●	
			RAL 9016	1	1001521733	●	
400	430	KS2 400 S12 24V L	E6/C-0	1	521740	●	
			RAL 9016	1	1001521740	●	
		KS2 400 S12 24V L Z	E6/C-0	1	521743	●	
			RAL 9016	1	1001521743	●	
500	545	KS2 500 S12 24V L	E6/C-0	1	521750	●	
			RAL 9016	1	1001521750	●	
		KS2 500 S12 24V L Z	E6/C-0	1	521753	●	
			RAL 9016	1	1001521753	●	
600	545	KS2 600 S12 24V L	E6/C-0	1	521760	●	
			RAL 9016	1	1001521760	●	
		KS2 600 S12 24V L Z	E6/C-0	1	521763	●	
			RAL 9016	1	1001521763	●	
800	625	KS2 800 S12 24V L	E6/C-0	1	521780	●	
			RAL 9016	1	1001521780	●	
		KS2 800 S12 24V L Z	E6/C-0	1	521783	●	
			RAL 9016	1	1001521783	●	

选项							
特殊类型	每单元/件数	订购号	LZ	PG			
开窗器外壳颜色定制为RAL中的颜色			○	net			
下订单时注明:	1 – 4	516004	○	net			
	5 – 9	516004					
	10 – 49	516004					
	50 – 99	516004					
	≥100	516004					
连接电缆选择为以下长度:							
5 m – 无卤, 灰色 – 3 x 0,5 mm ²		501034	○	net			
10 m – 无卤, 灰色 – 3 x 0,5 mm ²		501036					
5 m – 无卤, 灰色 – 5 x 0,5 mm ²		501054	○	net			
10 m – 无卤, 灰色 – 5 x 0,5 mm ²		501056					
S12微处理器编程							
缩短行程		524190	○	net			
其他特殊功能		524180					
可选配件	每单元/件数	订购号	LZ	PG			
M-COM模块: 用于驱动多台开窗器同步的模块	1	524177	●				